


FL 500 B-1

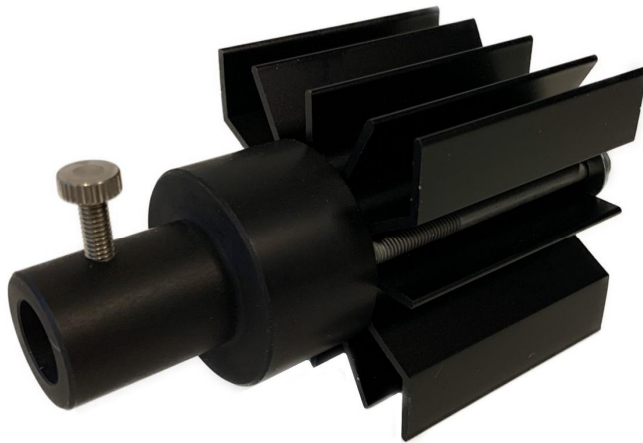


A silent, compact, versatile and extremely energy-efficient light generator.
Dimmable.

High LED quality. Extremely long life. Easy handling. Ideal for many functional and decorative lighting solutions including interior, 'starry sky' and sauna lighting, niches and showcases.

FL 500 B-1

- For indoor use / dry locations
- For use with fibre optic lighting
- LED standard lifetime 25.000 hours
- Warm white light 3.000 K
- External electronic driver
- Black painted finish
- Dimmable 1-10 V / Push
- Light port: Ø9/Ø28 mm
-

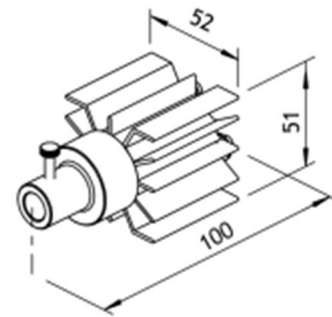

IP 20

0.5 kg

FL 500 B-1

F CE RoHS

Light port	Ø9/Ø28 mm
Fibre type	PMMA or glass
Material	Aluminium, plastic and other
Total power consumption	8W
LED power consumption (typ)	6W
LED lifetime expected	25.000h
Driver lifetime, expected	>50.000h (@Ta=3% failure level)
Supply voltage (mains)	220-240V 50/60Hz
Dimmer systems applicable	Push, Pot
Thermal protection	No
Cooling system	Natural convection
Ambient temperature	-20°C to 40°C
Applied LED	Cree
CCT (nominal)	2700K / 3000K
CRI _s (Ra) typical value	90

	Item no.
FL 500 B-1 Ø9 3000K	0120 7011
FL 500 B-1 Ø9 2700K	0120 7012
FL 500 B-1 Ø28 3000K	0120 7015
FL 500 B-1 Ø9 3000K Pot	0120 7711
Accessories :	
FL 500 B-1 Mounting Kit	0126 7001

RobLight

RobLight A/S, Tunvej 120, DK-9900 Frederikshavn, T: +45 9244 4888, E: info@rob-light.com, www.rob-light.com

RobLight accepts no responsibility for possible errors in catalogues, brochures and other printed material.
RobLight reserves the right to alter or discontinue its products without notice. © 2019 RobLight A/S