


Bee spot



Beespot for indoor, outdoor or submerged use. Fully adjustable in all directions. For accent lighting, decorative effects and wall-washing. For facades, for surfaces large and small, for objects large and small. Fibre optic series also available.

Bee spot

- For outdoor use
- Indoor models also available
- Fibre models also available
- Warm white light, natural white light
- Dimmerable
- Easy to integrate
- Wall mounted

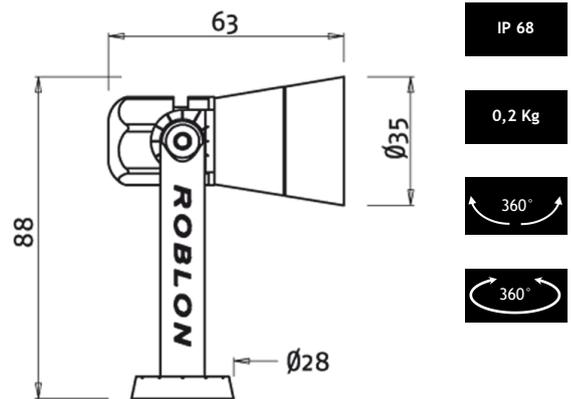

Bee spot



Size	Ø35 x 88 x 63
Material	AISI 303/316, plastic and other
Surface treatment	Glass
Colour	Stainless steel grey
Supply voltage (mains)	120-240V 50-60Hz
Total power consumption	2.5 W (dep. on selected driver solution)
LED power consumption	2 W
LED lifetime, expected	35.000h
Driver lifetime, expected	50.000h
Driver mode	Constant current
Dimmer	PUSH, 1-10V (dep. on selected driver solution)
Thermal protection	No
Cooling system	Natural convection
Ambient temperature	-20°C to 45°C
Applied LED	Cree / Osram
CCT (nominal)	3000K
CRI _s (Ra) typical value	90 or Min. 95
Optics	TIR optics
Beam angle	25° / 35° / 55° and 25/45°

	Item no.
Bee spot LED	1172 3401
Bee spot XT LED	1172 6820
Accessories :	
Lens 25°	1179 0250
Lens 35°	1179 0350
Lens 55°	1179 0550
Lens oval 25/45°	1179 0450
Bee spot arm	0313 0010