


Ara 1



Precise, controlled, well-defined light from a tiny, effective, well-designed LED fitting. For indoor use. Recessed and fixed. Choose 1 of 4 beam angles. Applications include object, display, area, ambient and accent lighting.

Ball & Socket Medium

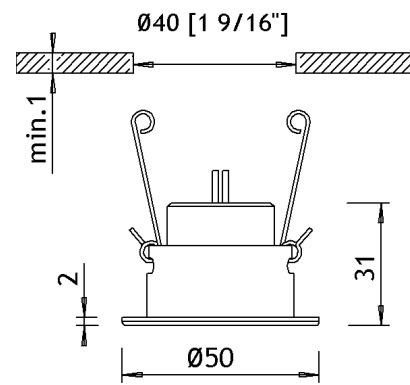

Ball & Socket Medium

Thermal protection	No
Max. ambient temperature	40 °C
Min. ambient temperature	-10 °C
Light source	LED
Light source lifetime	50000 h
Light source manufacturer	Cree
Light source colour temperature	3,000 K
Light source CRI	90+
Light source CRI-8 (Ra)	Min. 90
Protection rating	IP 20
Cleaning	Dry cloth only
Material	Aluminium
Weight	90 g
Total luminous flux	115 lm
Surface treatment	Anodised
Beam angle	10°, 20°, 30°, or 48° / 8°
Tilt	Fixed and 30°
Mounting	Recessed
Mounting hole	Ø40 mm
Built-in height	29 mm

	Item no.
Ara 1 fixed 3000K black	1146 3110
Ara 1 30 3000K black	1140 3110
Accessories:	
Driver set3, 1-10V, 700mA	1148 0033