


Mini Downlight Wide



Well-defined, effective light from a well-designed miniature downlight. For indoor use and wet locations. Roblon fibre optic technology. Recessed and fixed. Lens-free. Low-glare. Mounting Ø18 mm. Beam angle 54°. For display, surface, object, area and accent lighting. For showcases, saunas, niches, shelves, ceilings and many other applications.

Mini Downlight Wide

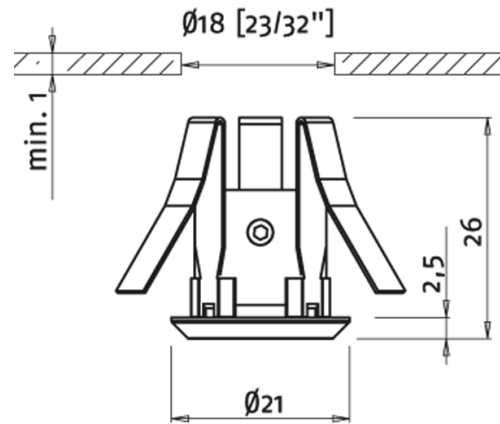

IP 44

14 g

Mini Downlight Wide

Beam angle	54°
Material	Aluminium
Colour	Black
Surface treatment	Anodised
Size	$\varnothing 21 \times 2.5$ mm
Weight	13 g
Mounting	Recessed with spring
Mounting hole	$\varnothing 18$ mm
Built-in height	23.5 mm
Min. tail size	$\varnothing 1$ mm
Max. tail size	$\varnothing 6$ mm
Protection rating	IP 20

	Item no.
Mini Downlight Wide black	0310 1230
Mini Downlight Wide gold	0310 1250
Mini Downlight Wide grey	0310 1212
Accessories:	
Fitting Termination	9903 0001

RobLight

RobLight A/S, Gl. Skagensvej 105 H, DK-9900 Frederikshavn, T: +45 9244 4888, E: info@rob-light.com, www.rob-light.com

RobLight accepts no responsibility for possible errors in catalogues, brochures and other printed material.
RobLight reserves the right to alter or discontinue its products without notice. © 2019 RobLight A/S